




DEACTIVATOR

Reduce engine load

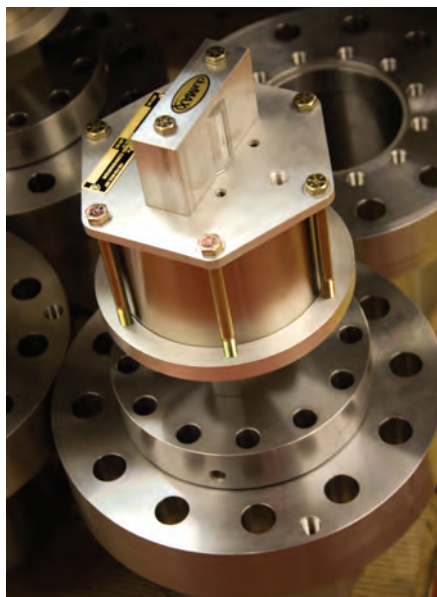

CECO's durMAX™ deactivator reduces engine load for optimum fuel efficiency. The plug-type design avoids inherent operational problems and breakage related to finger-type deactivators.

RUGGED RELIABILITY

The deactivator's operating shaft is made of noncorrosive high strength alloy steel. Two cast-iron rings guide the self-aligning plunger, allowing it to seal properly. The plunger and guide are heat-treated 4140 steel and are hardened to provide long, problem-free operation. The operating cylinder has a noncorrosive wear surface for longer service life.

UNIQUE DESIGN

Our deactivators unload one end of a compressor cylinder, avoiding driver overload and assist in maintaining 100% engine load for optimum fuel efficiency. The fail-safe design assures you that they will open on zero operating pressure, allowing for automatic unloading. We drill into the plunger in order to allow gas to flow and virtually equalize the pressure, reducing residual forces. The unloader piston does not feel the full effect of the cyclic pressure assuring long plunger and seat life.

ENGINEERED QUALITY

CECO has been delivering OEM SuperiorSM products and services to the gas transmission, gas processing and petrochemical industries since 1964.

The durMAX™ deactivators ship as a complete unit and ready to install. CECO offers experts to oversee the installation and train your station personnel to assure the successful commissioning and operation of these custom-designed deactivators.

- Plug-type design
- Removable packing gland
- Working cylinder and plunger guide are integral
- Balanced piston design
- Fail-safe design
- API construction
- Upper cylinder parts interchangeable with clearance pocket actuator parts



CONTACT US

5440 Alder Dr.
Houston, Texas 77081

Phone

800-TRY-CECO

800-879-2326

713-664-7333

Fax

713-664-6444

Email

cecosales@ceconet.com

www.tryceco.com